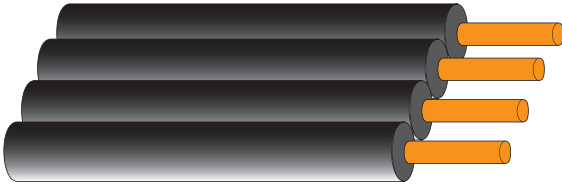


UL2651 Flat Ribbon Wire 排线

Stranded tinned or bare copper conductor, 36-14 AWG minimum, Lead free PVC insulation

导体使用 36-14 AWG 以上绞合镀锡或裸铜线, 无铅聚氯乙烯绝缘

PRODUCT DESCRIPTION 产品说明

E148000 AWM STYLE 2651 AWG NO. 105C 300V VW-1 --- AWM I A 105C 300V FT1 -LF- PCXX LTK

- Rated temperature 额定温度 : 105°C
- Rated voltage 额定电压 : 300V
- Reference standard 参考标准 :
UL 758, UL1581 & CSA C22.2 No.210
- Passes UL VW-1 & CSA FT1 vertical flame test
通过 UL VW-1 及 CSA FT1 垂直耐燃测试

Conductor 导体			Insulation 绝缘		Max. DC Resistance at 20°C 最大电阻 (ohm/km)
No. of Cores 芯数	AWG 线规	No./mm 线数/线径	Thickness 厚度 (mm)	Diameter 外径 (mm)	
2	30	7/0.10	0.35	1.00x2.00	381
4	30	7/0.10	0.28	0.85x3.85	381
9	30	7/0.10	0.23	0.85x8.21	381
2	28	7/0.127	0.41	1.20x2.50	239
3	28	7/0.127	0.23	0.90x3.44	239
4	28	7/0.127	0.23	0.90x3.90	239
5	28	7/0.127	0.23	0.90x4.90	239
6	28	7/0.127	0.26	0.90x5.90	239
7	28	7/0.127	0.26	0.90x6.90	239
8	28	7/0.127	0.26	0.90x7.90	239
10	28	7/0.127	0.38	1.20x13.00	239
2	26	7/0.16	0.23	1.00x2.27	150
3	26	7/0.16	0.23	1.00x5.00	150
4	26	7/0.16	0.23	0.95x8.45	150
5	26	7/0.16	0.40	1.40x11.40	150
6	26	7/0.16	0.23	0.95x13.50	150
9	26	7/0.16	0.48	1.00x21.00	150
14	26	7/0.16	0.48	1.00x14.00	150
2	24	11/0.16	0.45	1.50x3.10	94.2
3	24	7/0.20	0.38	1.45x6.45	94.2
4	24	7/0.20	0.23	1.45x10.45	94.2
6	24	7/0.20	0.38	1.45x13.95	94.2
2	22	17/0.16	0.26	1.28x2.66	59.4
5	22	7/0.254	0.38	1.62x11.78	59.4
2	20	7/0.32	0.38	1.85x3.80	36.7
2	18	41/0.16	0.46	2.10x4.30	23.3

