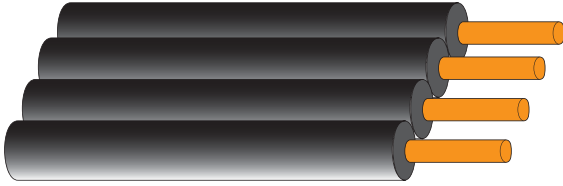


**UL4478 Crosslinked Flat Ribbon Wire 交联非线**

Stranded bare or tinned copper conductor, 36-10 AWG, XLPE insulation

导体使用 36-10 AWG 绞合裸铜或镀锡铜线, 交联聚乙烯绝缘

**PRODUCT DESCRIPTION 产品说明**

E148000 AWM STYLE 4478 AWG NO. 105C 300V H --- c AWM I A 105C 300V FT2 -HF- -LF- PCXX LTK

- Rated temperature 额定温度 : 105°C
- Rated voltage 额定电压 : 300V
- Reference standard 参考标准 :  
UL 758, UL1581 & CSA C22.2 No.210
- Passes UL H & CSA FT2 horizontal flame test  
通过 UL H 及 CSA FT2 水平耐燃测试

Conductor 导体			Insulation 绝缘	Max. DC Resistance at 20°C 最大电阻 (ohm/km)
No. of Cores 芯数	AWG 线规	No./mm 线数/线径	Diameter 外径 (mm)	
2	28	7/0.127	0.90x1.90	239
10	28	7/0.127	0.90x12.33	239
14	28	7/0.127	0.90x17.41	239
16	28	7/0.127	0.90x19.95	239
3	26	7/0.16	0.95x6.00	150
4	26	7/0.16	0.95x7.00	150
8	26	7/0.16	0.95x12.00	150
10	26	7/0.16	0.95x20.00	150

