

UL21457 Multi-conductor Shielded Cable 多芯屏蔽电线

Stranded bare or tinned copper conductor, 30-16 AWG, mPPE-PE insulation,
Braid or spiral shield, mPPE-PE jacket

导体使用 30-16 AWG 绞合裸铜或镀锡铜线, 改性聚苯醚-聚乙烯绝缘, 编织或斜包屏蔽, 改性聚苯醚-聚乙烯护套

PRODUCT DESCRIPTION 产品说明



E148000 AWM STYLE 21457 AWG NO. 80°C VW-1 --- c AWM I A 80°C 300V FT1 -HF- -LF- PCXX LTK

- Rated temperature 额定温度 : 80°C
- Rated voltage 额定电压 : 300V
- Reference standard 参考标准 :
UL 758, UL1581 & CSA C22.2 No. 210
- Passes UL VW-1 & CSA FT1 vertical flame test
通过 UL VW-1 及 CSA FT1 垂直耐燃测试


Conductor 导体			Insulation 绝缘		Jacket 护套	Max. DC Resistance at 20°C 最大电阻 (ohm/km)
No. of Cores 芯数	AWG 线规	No./mm 线数/线径	Thickness 厚度 (mm)	Diameter 外径 (mm)	Diameter 外径 (mm)	
3	26	7/0.16	0.26	1.00	3.80	150
4	26	7/0.16	0.26	1.00	4.10	150
5	24	7/0.20	0.26	1.12	4.80	94.2
6	24	7/0.20	0.26	1.12	5.20	94.2
7	22	17/0.16	0.26	1.28	5.70	59.4
8	22	17/0.16	0.26	1.28	6.20	59.4
3	20	26/0.16	0.26	1.46	5.00	36.7

UL21458 Flat Ribbon Wire 排线

Stranded bare or tinned copper conductor, 32-16 AWG, mPPE-PE insulation

导体使用 32-16 AWG 绞合裸铜或镀锡铜线, 改性聚苯醚-聚乙烯绝缘

PRODUCT DESCRIPTION 产品说明

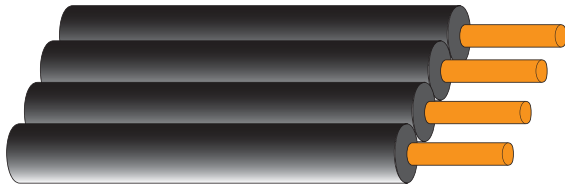

E148000 AWM STYLE 21458 AWG NO. 80°C 300V VW-1 --- c AWM I A AWM 80°C 300V FT1 -F- -HF- -LF- PCXX LTK

- Rated temperature 额定温度 : 80°C
- Rated voltage 额定电压 : 300V
- Reference standard 参考标准 :
UL 758, UL1581 & CSA C22.2 No. 210
- Passes UL VW-1 & CSA FT1 vertical flame test
通过 UL VW-1 及 CSA FT1 垂直耐燃测试

Conductor 导体			Insulation 绝缘		Max. DC Resistance at 20°C 最大电阻 (ohm/km)
No. of Cores 芯数	AWG 线规	No./mm 线数/线径	Thickness 厚度 (mm)	Diameter 外径 (mm)	
2	28	7/0.127	0.43	1.24x2.58	239
3	28	7/0.127	0.43	1.24x3.92	239
4	28	7/0.127	0.43	1.24x5.26	239
5	28	7/0.127	0.43	1.24x6.60	239
6	28	7/0.127	0.43	1.24x7.94	239
7	28	7/0.127	0.43	1.24x9.28	239
2	26	7/0.16	0.43	1.34x2.78	150
3	26	7/0.16	0.43	1.34x4.22	150
4	26	7/0.16	0.43	1.34x5.66	150
5	26	7/0.16	0.43	1.34x7.10	150
6	26	7/0.16	0.43	1.34x8.54	150
7	26	7/0.16	0.43	1.34x10.00	150
2	24	7/0.20	0.43	1.45x3.04	94.2
3	24	7/0.20	0.43	1.45x4.63	94.2
4	24	7/0.20	0.43	1.45x6.22	94.2
5	24	7/0.20	0.43	1.45x7.81	94.2
6	24	7/0.20	0.43	1.45x9.40	94.2
7	24	7/0.20	0.43	1.45x11.00	94.2
2	22	7/0.254	0.43	1.62x3.34	59.4
3	22	7/0.254	0.43	1.62x5.06	59.4
4	22	7/0.254	0.43	1.62x6.78	59.4
5	22	7/0.254	0.43	1.62x8.50	59.4
6	22	7/0.254	0.43	1.62x10.22	59.4
7	22	7/0.254	0.43	1.62x11.94	59.4
2	20	26/0.16	0.43	1.80x3.70	36.7
2	18	41/0.16	0.43	2.04x4.23	23.3

1. Only part of products are listed above.
以上表格只列出一部份产品。
2. The above information is for reference only, and is subject to the final specification.
以上数字仅为参考值, 数字以最终规格书为准。

